


Product APPLICATION Guide

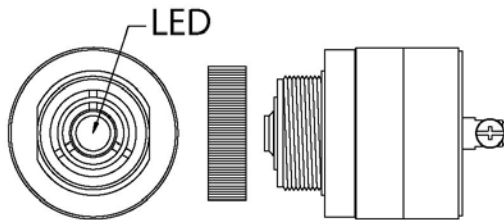

LED Screw Neck Panel Mount

LED Screw Neck Panel Mount- Continuous Tone

Non-RoHS Part No.	RoHS Part No.	UL	Min Sound Level dBa (2 ft)	Freq. (Hz)	Operating Voltage	Max Current (mA)	Size Dia x Len (in)	Termination Type
Medium Sound Level- Blinking LED + Continuous Tone								
LSC616	N/A		68 - 80	2900	6-16 Vdc	45 - 67	1.69 x 0.81	Screw Terms
Loud Sound Level- Blinking LED + Continuous Tone								
LSC616N	N/A		80 - 95	2900	6-16 Vdc	40 - 60	1.69 x 0.81	Screw Terms
LSC110N	N/A		85 - 97	2900	30-120 Vac/dc	43 - 63	1.69 x 1.38	Screw Terms
LSC250N	N/A		82 - 90	2900	60-250 Vac/dc	42 - 61	1.69 x 1.38	Screw Terms
LSC628AN	N/A		85 - 95	2900	6-28 Vac/dc	42 - 65	1.69 x 1.38	Screw Terms

Call 317-612-1000 or Visit www.mallory-sonalert.com for More Details