


**Specifications:**

Sound level Category	Medium Sound Level
Mode of Operation	Dual Tone
Mounting	Panel (see note)
Voltage Rating	10 to 45 VDC
Frequency	800 - 600 Hz
Loudness (Typical)	80 dB(A) @ 2 FT
Current Draw (max)	50 mA
Storage Temperature	-40°C to +65°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	78 g
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

**Dimensions:** Inches (mm)

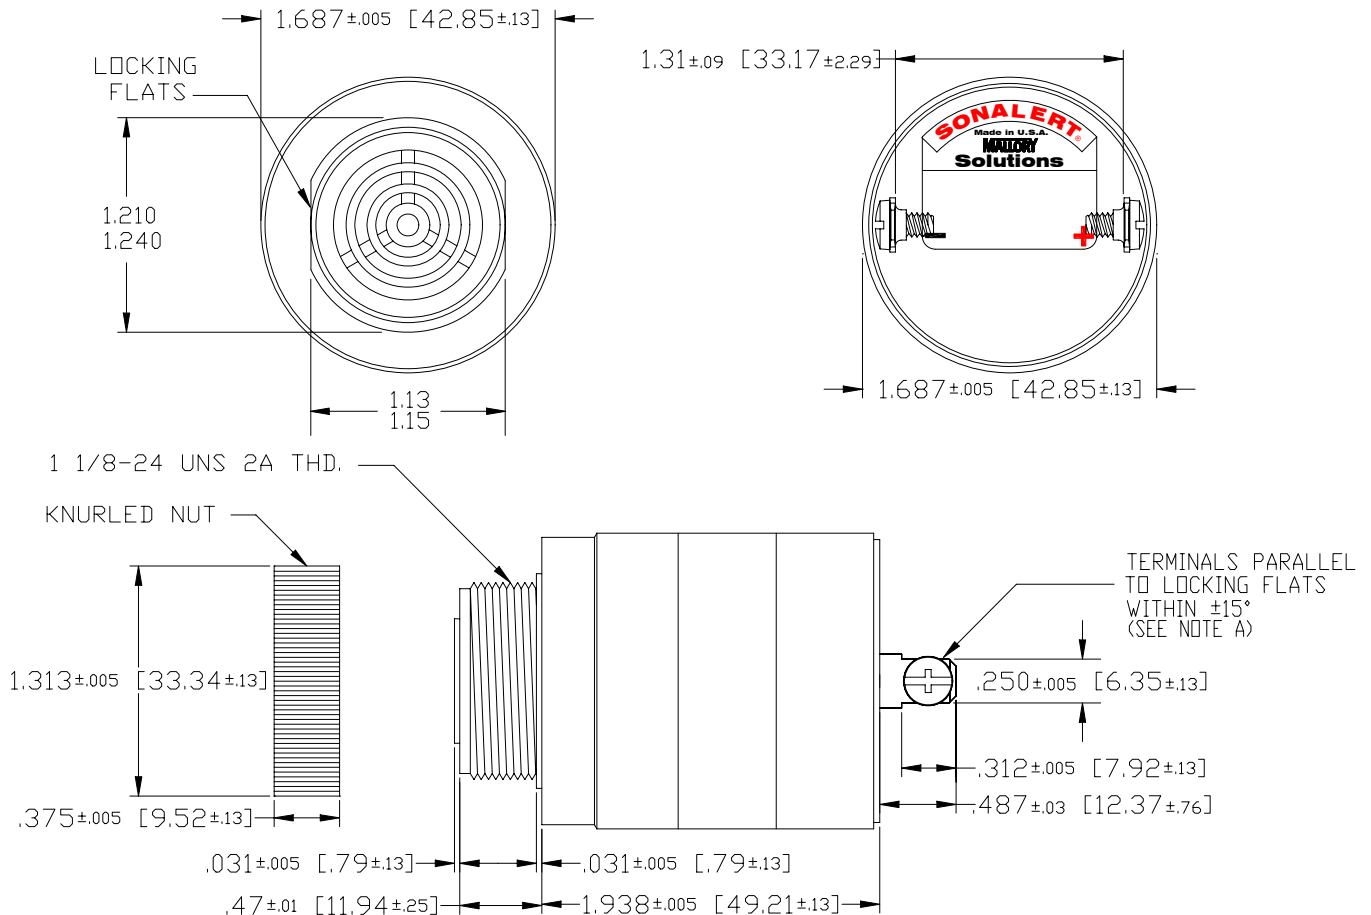

NOTE: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION IS NEEDED, NOTE LOCKING FLATS ON DRAWING. SCREW NUT BACK ON. DO NOT OVERTIGHTEN.