



Mallory Sonalert Products, Inc.

Part #:

MSR320SR

Sales Outline Drawing

Revision:


C

Specifications:

| | |
|-----------------------|-------------------------|
| Sound Level Category | Medium |
| Mode of Operation | Continuous |
| Voltage Rating | 3 to 20 VDC |
| Frequency | 3500 ± 500 Hz |
| Loudness @ 2 FT | 71 to 86 Typ. |
| Current Draw | 3-16 mA |
| Housing Material | 6/6 Nylon, Color: Black |
| Storage Temperature | -40° to +85° C |
| Operating Temperature | -40° to +85° C |
| Weight (Typical) | 3.5g |
| Options | Please contact factory. |

Dimensions: Inches (mm)

ROHS Compliant

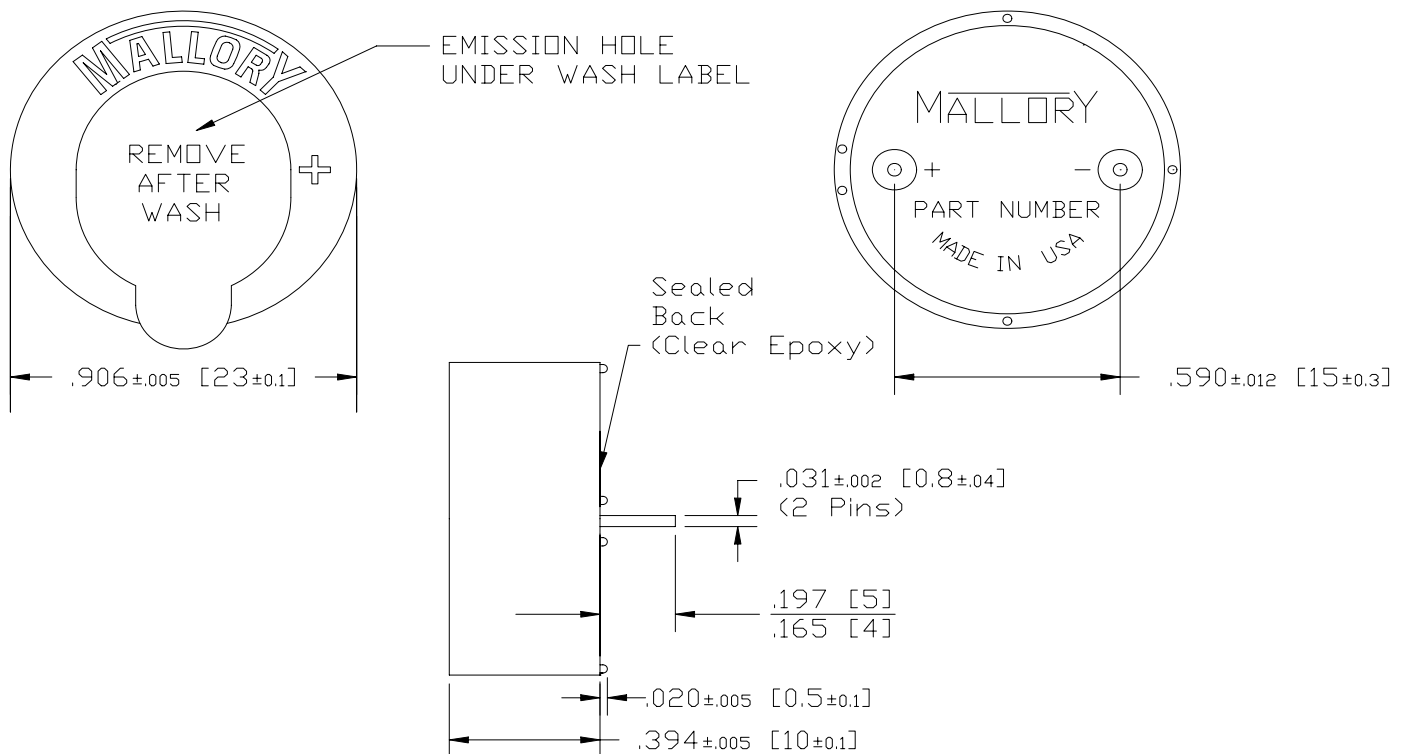

NOTE A:
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER. UNITS ARE SUITABLE FOR WAVE SOLDERING AND AQUEOUS WASH WHEN THE EMISSION HOLE IS COVERED WITH A WASH LABEL. RECOMMENDED MAXIMUM TEMPERATURE AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.