MALLORY Mallory Sonalert Products Inc.	Part # PK-27A29ERB48Q
Sales Outline Drawing	Revision **A**

Specifications:

Oscillation Frequency (Hz)	2800 ± 500
Operating Voltage (Vdc)	9 ~ 48
Current Consumption Max. (mA)	3 at 9Vdc 18 at 48VDC
Sound Pressure Level (dB/min) at 2ft	77 at 9VDC 85 at 48Vdc
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +80
Lead Pin	Tin Plated Brass
Housing	ABS 757 UL94HB Plastic resin (Color: Black)
Weight (Grams)	23
Options	For other options contact factory
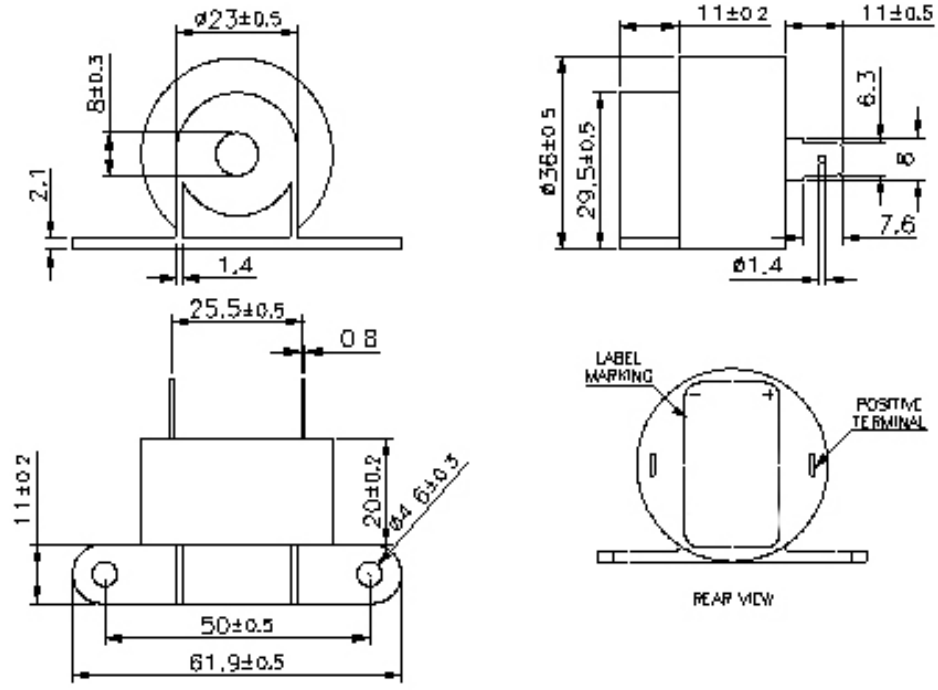
Dimensions: (units: mm)